



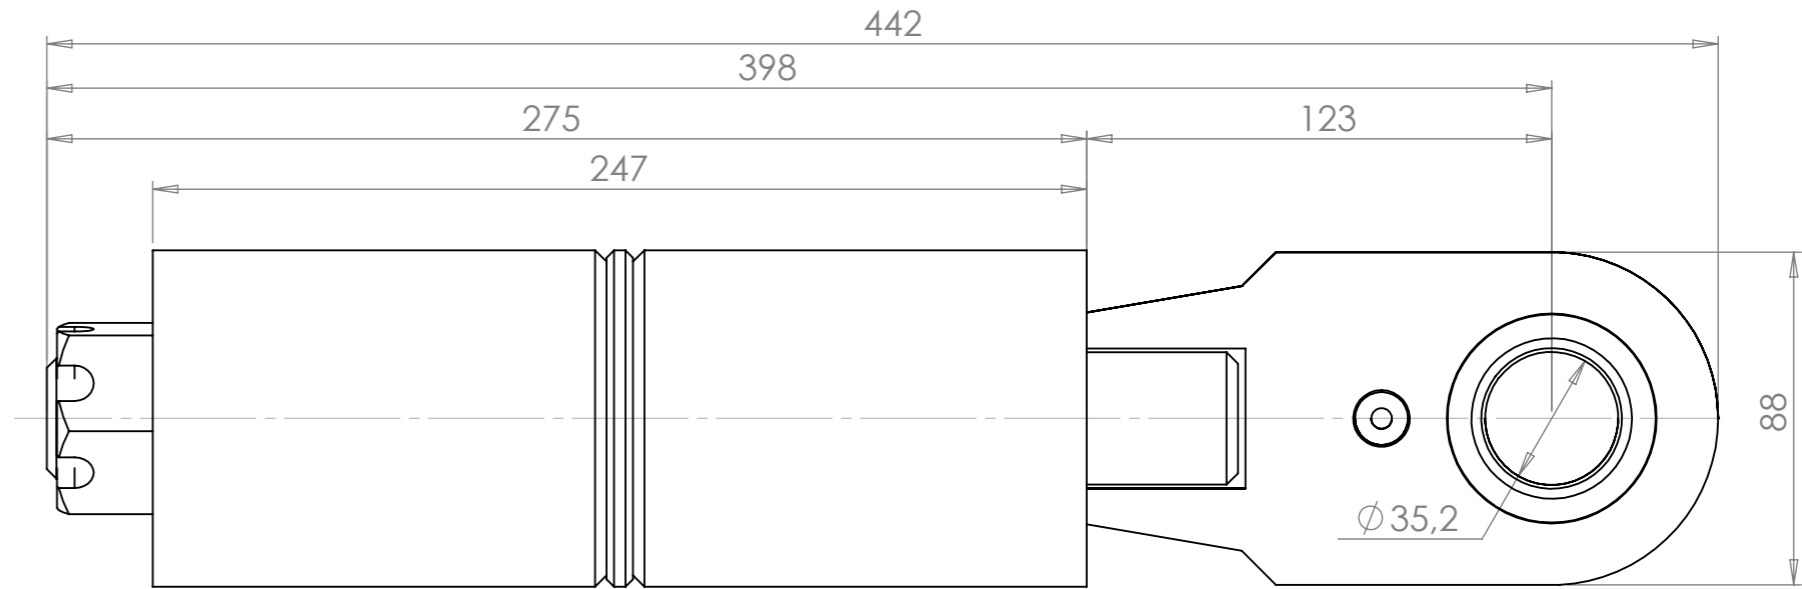

MODIFICACIONES		
ERA	ES	FECHA

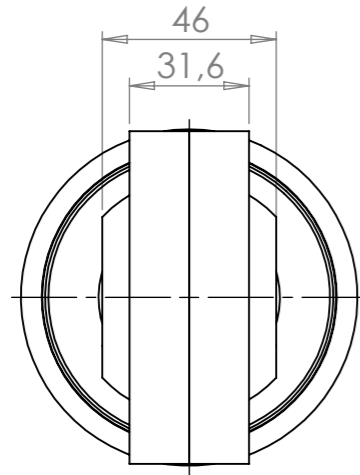

ATENCIÓN:
 -Usar solamante en tolvas con dos ejes,
 no esta permitido para tolvas de un eje-

TOLERANCIAS NO INDICADAS SEGÚN DIN 7168											
Dimensiones	de 0.5 a 3	> 3 a 6	> 6 a 30	> 30 a 120	> 120 a 400	> 400 a 1000	> 1000 a 2000	> 2000 a 4000	> 4000 a 8000	> 8000 a 12000	> 12000 a 20000
Fina (mecanizado)	± 0.05	± 0.05	± 0.1	± 0.15	± 0.20	± 0.30	± 0.5	± 0.8	-	-	-
Basta	-	± 0.5	± 1.0	± 1.5	± 2.0	± 3.0	± 4.0	± 6.0	± 8.0	± 10.0	± 12.0

Observación Al menos otras indicaciones las dimensiones son expresadas en milímetros	Cant: X	Fecha	Nombre	Firma	Plano N° 3 02 00 150	 TORCEN
	Dib.	12/08/14	Ing. Marino E.		Peso: Kg.	
	Rev.					
	Apr.					
	Esc. 1:5	Material	Provisión			
	Denominación: Enganche amortiguado 8 elementos - 12 tn -				Equipo	
A3					Revisión 00	